


LCD Remote Screen



Compatible with both 12V and 24V Modified and Pure Sine Wave POWERinvert PRO inverters

Works with all OSRAM POWERinvert PRO inverters




Multifunction Readings1. DC Voltage Input2. AC Voltage Output3. Continuous Wattage4. Amp hour

Full picture of how the inverter is performing and the state of health the vehicle's battery



6m of Cable

So it can be mounted in an accessible area away from the inverter



Complemented by the LCD frame (OINVFRM) for secure housing

Bracket provides additional protection to the screen and secure fixing



Accessories for inverter

OSRAM POWERinvert PRO is an extensive range of professional heavy duty inverters for remote working. Available in either Pure Sine Wave or Modified Sine Wave for both 12V and 24V applications.OSRAM POWERinvert Pro inverters take the 12V or 24V DC vehicle electrical supply and invert into 230V AC mains power to run and operate electrical equipment from service vehicles. Pure Sine Wave Inverters produce a sine wave with the same frequency as mains power, with no distortion, to power sensitive electronics.Modified Inverters have distorted frequency, meaning they will power less complicated products such as fridges and power tools.


Product datasheet

Technical data

Product information

| | |
|---|--------------------|
| Application (Category and Product specific) | Inverter accessory |
|---|--------------------|

Dimensions & weight

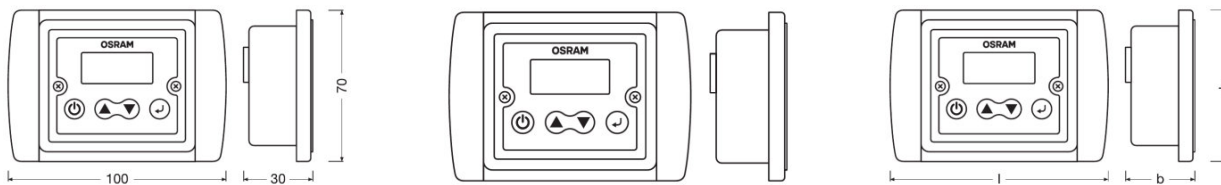

| | |
|----------------------------|---------|
| Length | 70.0 mm |
| Width | 27.8 mm |
| Height | 99.5 mm |
| Input Cable Gauge / Length | 6 m |

Certificates & standards

| | |
|-----------|--------------------------------|
| Standards | CE-EMC / ROHS / WEEE / E- Mark |
|-----------|--------------------------------|

Environmental information

| Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH) | |
|---|---------------|
| Date of Declaration | 23-02-2023 |
| Primary Article Identifier | 4052899631113 |
| Declaration No. in SCIP database | In work |

Logistical Data

| Product code | Product description | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Volume | Gross weight |
|---------------|---------------------------|------------------------------|--------------------------------------|-----------------------|--------------|
| 4052899631113 | LCD Remote Screen OINVLCD | Folding carton box 1 | 80 mm x 73 mm x 142 mm | 0.83 dm ³ | 95.00 g |
| 4062172298865 | LCD Remote Screen OINVLCD | Shipping carton box 50 | 424 mm x 309 mm x 394 mm | 51.62 dm ³ | 5520.00 g |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Product datasheet

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Safety advice

Tested and certified to the relevant EMC and LVD Directives.

Legal advice

CE Approved

RoHS and WEEE Approved.

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

The OSRAM logo is displayed in a bold, orange, sans-serif font.